



# Diamond Selection Double Diaphragm Pumps

## Recommended for

- ✓ Oil
- ✓ Waste oil
- ✓ ATF

## Recommended for

- ✓ Gasoline
- ✓ Diesel fuel

**WARNING! P/N 1035 and 1040 not suitable for flammable liquid**




## Part # 1035

## Part # 1040

## Part # 1040UL

Will safely pump gasoline and diesel fuel (when grounded) UL Listed

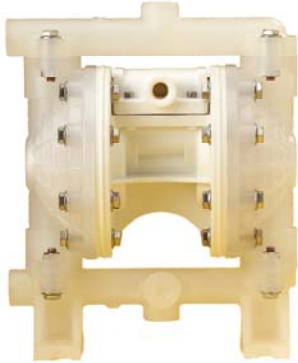

### Air operated 1:1 Double Diaphragm Pumps

#### Features

- ❖ Non-stalling
- ❖ Lube-free

Specifications	1035	1040	1040UL
Maximum Flow	14 GPM	37 GPM	37 GPM
Inlet/Outlet	1/2" NPT	1" NPT	1" NPT
Body Construction	Polypropylene	Aluminum/Poly	Aluminum
Diaphragm	Buna N	Buna N	Buna N
Balls	Acetal	Acetal	Teflon
Seats	Polypropylene	Aluminum	Aluminum
UL Listed	No	No	Yes

#### Recommended accessory options

- ❖ Air line filter with automatic drain, regulator, gauge, ball valve and quick disconnects (1559A-ASSY)
- ❖ Wall mount bracket ( P/N 96)

## Part # 1035M

### 1/2" Split Inlet Mixing Pump

For mixing 50% water and 50% antifreeze or windshield fluids

#### Features

- ❖ Polypropylene construction
- ❖ Flow rate 14 GPM
- ❖ Buna N diaphragm
- ❖ Acetal balls, Poly. seats
- ❖ 1/2" NPT inlet
- ❖ 1/2" NPT outlet

