

Motosel ATF +

AUTOMATIC TRANSMISSION FLUID


Motosel Full Synthetic Automatic Transmission Fluid is formulated to meet the stringent specifications of Chrysler including Chrysler ATF+, +2, +3 (MS 7176E), +4 (MS 9602), NAG 1, Dodge MOPAR AS 68 RC and AS 69 RC (T-IV), and JWS 3309. It provides extreme protection including additional oxidation control, excellent low temperature and superior shear stability performance in modern passenger car, flex-fuel vehicle, hybrid, truck, and sport utility vehicle transmissions. It is suitable for use in automatic transmissions calling for GM DEXRON® II/III/III-E/III-H, Ford MERCON®LV, Allison C-3 & C-4, CAT TO-2, Honda Z-1, DW-1, Hyundai/Kia SP-II/III/IV, JASO 1A, 2A, Nissan Matic Fluids, Toyota T-III, T-IV, WS and many other American, Asian and European OEM's performance standards including Mercedes Benz NAG 1, MAN 339A, Mazda, Mitsubishi, Subaru, Porsche, Voith 55.6335, VW, ZF TE-ML 21L, ZF 8 & 9 speed and BMW 4- and 5-speed automatic transmission specifications.

Benefits and Applications

- Full synthetic maximum corrosion, wear, and rust protection
- Outstanding low temperature flow properties
- Enhanced friction additives and oxidation stability for longer fluid life
- Smooth shifting and reduce shudder performance
- High compatibility - suitable for use in most applications

Chrysler Formulation:

for applications where Chrysler ATF+, +2, +3 (MS 7176E), +4 (MS 9602), Chrysler/Dodge MOPAR AS 68 RC and AS 69 RC (T-IV), JWS 330, Jeep 05127382AA, 68043742AA, and 68171866AA specifications are recommended.

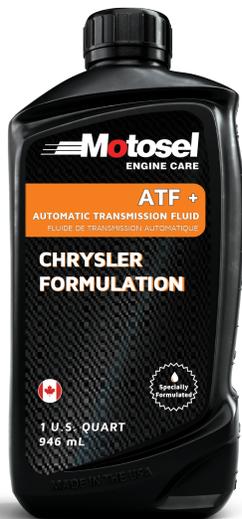

#4004M / 1Qt
 #M-0267 / 5Gal
 #M-0150 / 22.7L
 #M-0268 / Drum
 #M-0270 / Bulk

TYPICAL CHARACTERISTICS - ATF +

| SAE GRADE | TEST METHOD | ATF + |
|---------------------------|-------------|-------------|
| Colour | Visual | Red |
| Viscosity @ 100°C, cSt | ASTMD 445 | 7.0 |
| Viscosity @ 40°C, cSt | ASTMD 445 | 32.9 |
| Viscosity Index | ASTMD 2270 | 180 |
| Pour Point, °C/°F | ASTMD 97 | -51/-59.8 |
| Flash Point, COC °C/°F | ASTMD 92 | 204 / 339.2 |
| API Gravity | ASTMD 1298 | 32.6 |
| Brookfield Vis.cP @ -40°C | ASTMD 2983 | 16200 |

Typical test data are average values only. Minor variations, which do not affect performance, may occur. You should consult your owner's manual to verify proper fluid recommendation for your particular vehicle.

HANDLING AND SAFETY INFORMATION - Refer to MOTOSEL (SDS) Safety Data Sheets for proper handling and safety information. Use the same care and handling as for any petroleum product. Nothing herein shall be deemed to constitute a warranty, express or implied, that said information or data are correct or that the products described are merchantable or fit for a particular purpose, or that said information, data or products can be used without infringing patents of third parties.



WWW.MOTOSEL.COM
INFO@MOTOSEL.COM
 +1-888-668-6463